

	TS 254
Order no.	6.00668
Dimensions L x W x H	740 x 750 x 355 mm
Table size L x W (min./max.)	670/970 x 715/995 mm
Working height	850/355 mm
Maximum cutting height (90°/45°)	87/50 mm
Max. cutting width at parallel guide	630 mm
No-load speed	4.200/min
Max. cutting speed	56 m/s
Saw blade	ø 254 x 30 mm
Rated input power	2 kW
Saw blade swivel range	-1,5° bis 46,5°
Weight including stand	33,4 kg

Carbide circular saw blade with alternately bevel-ground tips (40 teeth), stand, hard rubber tyres, parallel guide/ripping fence, mitre guide, table length extension, table width extension, saw blade case, chip and dust extraction unit, rubber cable (3 m), push stick

Accessories circular saw blades HW/CT; ø 254 x 2.4 x 30 mm	Order no.
Circular saw blade PowerCut; WZ; 24 Z	6.28025
Circular saw blade PrecisionCut; WZ; 40 Z	6.28059
Circular saw blade MultiCut; FZ/TZ; 80 Z	6.28093
2 2 7 6 1	the second second

	All-purpose vacuum cleaners ASR 35 L AutoClean	All-purpose vacuum cleaners ASR 35 M AutoClean
Order no.	6.02055	6.02056
Dust class	min. L	min. M



The benchmark for mobility

The compact table saw TS 254 with integrated foldable stand





Your Metabo dealer:




The most compact of its class

The new table table saw TS 254 with integrated foldable stand

The new TS 254 makes it even easier for you as a professional to have a table saw on site. Its stand is completely integrated into the saw housing and can be extended and stowed away in a matter of seconds. This doesn't make it only uniquely compact, but it is also by far the lightest table saw of its kind. Furthermore, all attachments can be stowed away in a compartment on the casing. Thanks to the hard rubber tyres, the TS 254 can be pulled easily, thus setting a new benchmark for mobility in compact table saws.

The lightest mobile table saw

With 33.4 kg including stand, the TS 254 is up to 50% lighter when compared to other mobile table saws in its class (including stand with wheels)!

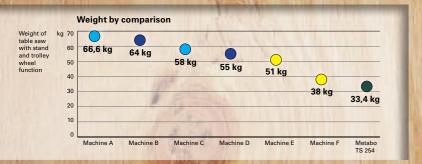



Integrated foldable stand

Compact and extremely stable at the same time!



Second working height

allowing you to work near ground level

More highlights

For your safety:

 Fast motor brake brings the saw blade to a standstill in just 3 seconds

Broad range of applications e.g. for sawing

- No-volt release switch prevents accidental startup of the machine after a power cut
- Dual port dust extraction for low dust working

For your productivity:

Setup in 15 seconds only!

15 sec.

- High torque 2,200 Watt motor with electronic overload protection
- Riving knife that can be lowered without needing tools for short setup times
- Automatic resetting to 0–45° after undercuts